

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

OUTDOOR UNIT FEATURES:

- In response to EPA's low-carbon policy, using R32 refrigerant reduces carbonemissions by 68% compared to R410A.
- Maximum SEER2 of 18.15 and a maximum HSPF2 of 9.00.
- The heating capacity can be up to 70% of rated capacity in 5°F with a maximum COP 2.2.
- Flexible Installation with Long Piping.
- Low noise bring High Quality User Experience.
- Operate in a wide ambient temperature range: from 23°F~122°F in coolingmode, and from -13°F~78°F in heating mode.
- Fast Start without Preheating above 14°F.
- External static pressure can reach 35 Pa.



Model name			CHV6-RS24URBM
Ton			2
Model Power Supply	Phase Voltage	Hz	AC 1-Phase 208/230V 60Hz
Cooling capacity (Ducted/Non-ducted)	Rated capacity	Btu/h	24,000
	Input power (Ducted/Non-ducted)	kW	2.09/2.00
	EER2 (Ducted/Non-ducted)	(Btu/h)/W	11.50/12.00
	SEER2 (Ducted/Non-ducted)	(Btu/h)/W	18.15/18.15
Heating capacity (Ducted/Non-ducted)	Rated capacity	Btu/h	27,000
	Input power (Ducted/Non-ducted)	kW	2.08/1.93
	COP 47°F (Ducted/Non-ducted)	kW/kW	3.80/4.10
	Low temperature heating capacity	Btu/h	20,000
	Input power (Ducted/Non-ducted)	kW	2.34/2.09
	COP 17°F (Ducted/Non-ducted)	kW/kW	2.50/2.80
	HSPF2 (Ducted/Non-ducted)	(Btu/h)/W	8.50/9.00
Electrical parameters	MCA	A	20.9
	MOP	A	30
Air Flow Rate		CFM (m ³ /min)	2823 (80)
Out Dimension		in	33 ⁴ / ₆₄ x 43 ⁵ / ₁₆ x 15 ²³ / ₆₄
Net Weight		lbs. (kg)	190 (86)
Compressor Quantity		-	1
Compressor Type		-	Rotary
Refrigerant Type		-	R32
Refrigerant Charge Amount		lbs. (kg)	4.4 (2.0)
Refrigerant Flow Control		-	Micro-computer Control Expansion Valve
Condenser Fan Quantity		-	1
Cabinet Color		-	Ivory White
Refrigerant Piping	Gas Line	in	5/8"
	Liquid Line	in	3/8"
Maximum Number of Connectable IDU		-	4
Maximum Pipe Length to the Farthest Indoor Unit		ft	262
Height difference	Maximum below unit	ft	164
	Maximum above unit	ft	131
	Between IDUs	ft	49
Noise level	Cooling/Heating	dB(A)	49/51
Operation range	Cooling	°F DB	23 ~ 122
	Heating	°F WB	-13 ~ 78

NOTES:

1. The above cooling and heating capacities show the capacities when the outdoor unit is operated with the 100% rating of indoor units.

Cooling operation conditions: indoor air inlet temperature: 80°F DB 67°F WB, outdoor air inlet temperature: 95°F DB, Piping length: 25ft., Piping lift: 0ft..

Heating operation conditions: Nominal heating condition, indoor air inlet temperature: 70°F DB, outdoor air inlet temperature: 47°F DB 43°F WB.




Heating operation conditions: Low temp. heating condition, indoor air inlet temperature: 70°F DB, outdoor air inlet temperature: 17°F DB 15°F WB.

2. Rated capacity and efficiency are certified under AHRI Standard 1230. Ratings are subject to change without notice. Current certified ratings are available at www.ahridirectory.org.




3. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 3.3ft from the service cover surface and 4.9ft from floor level.

4. The final appearance of outdoor units is subject to the actual products.

Unit: inch (mm)

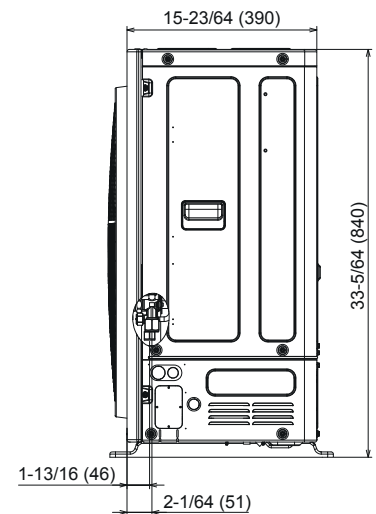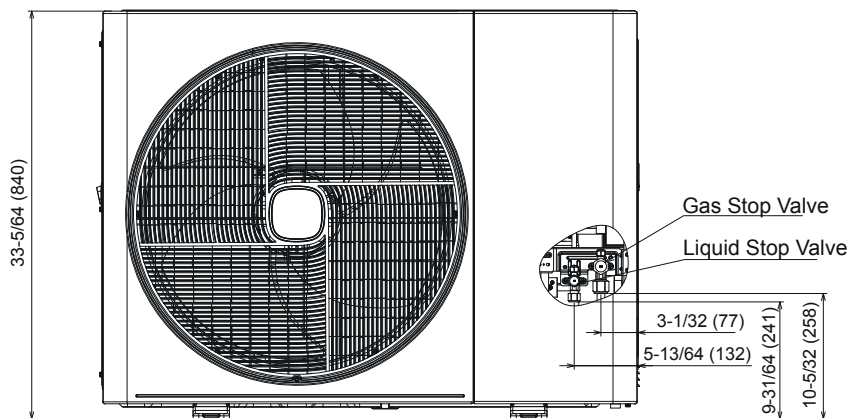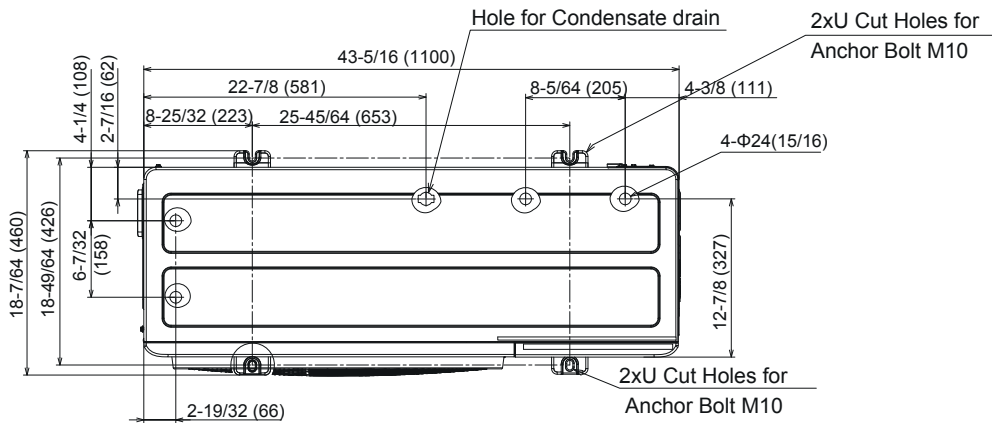

Unit: inch (mm)

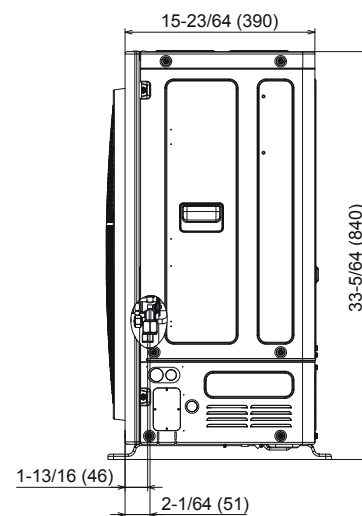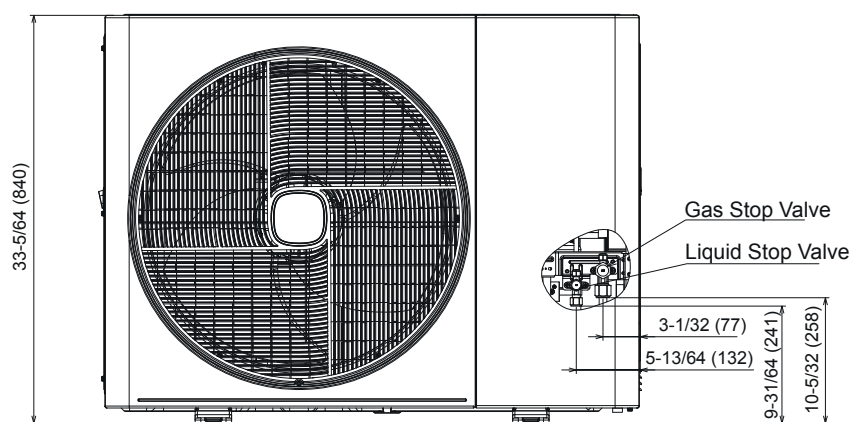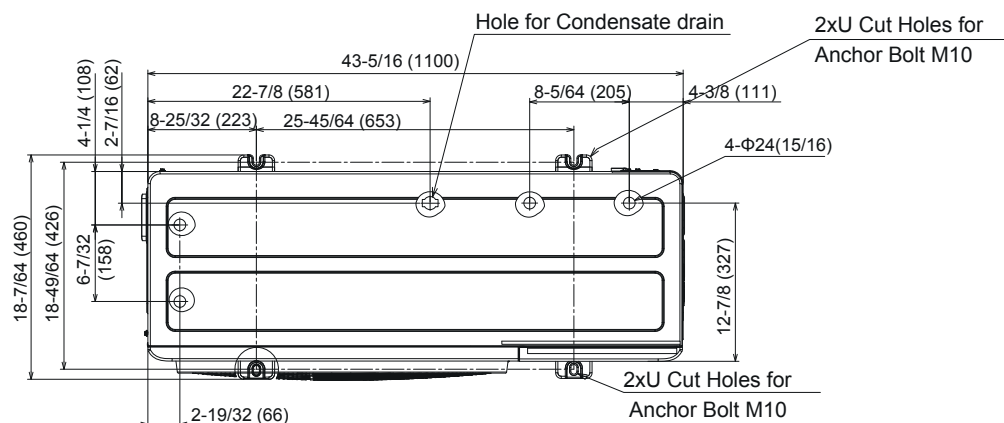

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____












Key Features:

- ◆ Extended cooling operation range to 5°F(-15°C)~122°F (50°C)
- ◆ Achieve lower operational range for cooling
- ◆ Wind Guard allows system to operate at 100% COOLING capacity at reduced outdoor temperatures, while Performance of high temperature cooling and heating will be slightly affected.










Model Match Table

Name	Wind Guard
Model	SPWG-01
Outdoor Unit Cabinet Specs.	33-5/64 x 43-5/16 x 15-23/64 in. (840 x 1100 x 390 mm)
Applicable Outdoor Unit	CHV7-24/36/48URBM

Dimension


No.	Name	Thumbnail	Dimensions (in. (mm))	
1	Front Wind Guard			
2	Left Wind Guard			
3	Rear Wind Guard			

Parts List

NO.	Parts Name	Qty.	Stamp Identification	Thumbnail	SH-SFB1F		
					Front Wind Guard	Left Wind Guard	Rear Wind Guard
1	Front Panel	1	SPWG-01		1	—	—
2	Left Panel	1	SPWG-02		—	1	—
3	Rear Panel	1	SPWG-03		—	—	1
4	Front Support Plate	2	SPWG-01A		2	—	—
5	Common Support Plate	3	SPWG-02A		—	1	2
6	Left Support Plate	1	SPWG-03A		—	1	—
7	Protective Pad	4	—		4	—	—
8	Screws	37	—		12	11	14
9	Instruction Manual	1	—		—	—	—

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

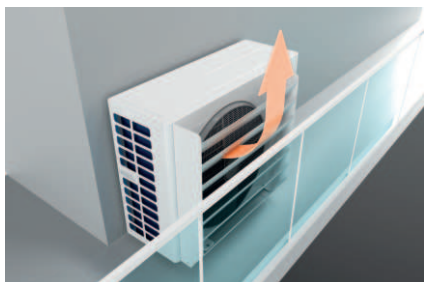

Key Features:


- ◆ For Flexible Air Discharge Directions: the well-designed air outlet guide can divert the airflow to up, left, or right directions
- ◆ Enhance the heat dissipation efficiency.

Model Match Table






Name	Air Outlet Guide
Model	SPAOG-01
Outdoor Unit Cabinet Specs.	33-5/64 x 43-5/16 x 15-23/64 in. (840 x 1100 x 390 mm)

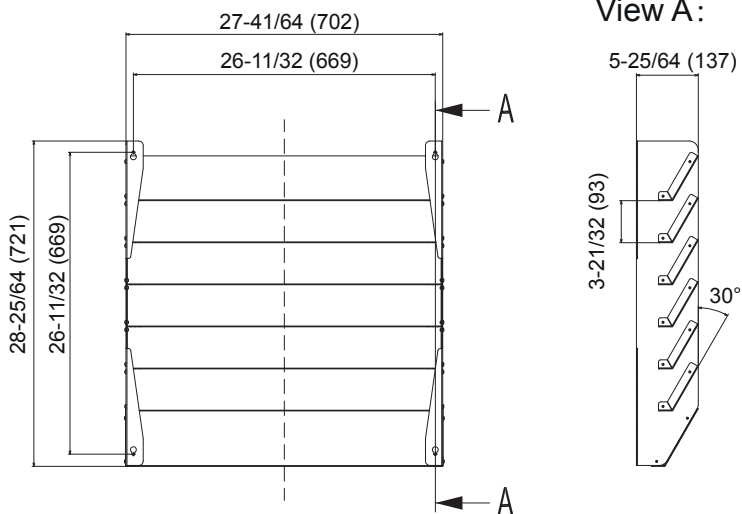Dimension

Unit: in. (mm)



Parts List

Name.	Air Outlet Guide	Screws	Instruction Manual	Protective Pad 1	Protective Pad 2
Thumbnail					
Quantity	1	4	1	2	2