

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____




Model name		CH-WTH24V
Power supply	V, Ph, Hz	Powered from indoor unit
Temperature setting range	°F	62-86 °F
Dimensions (H x W)	in	3.95" x 3.95"

FEATURES:

- ◆ LCD display TOUCHABLE SCREEN
- ◆ Malfunction code display: it can display the error code, helpful for service
- ◆ Room temperature display
- ◆ 2-way wire layout design, no raised part at backside, more convenient to place the wires and install device
- ◆ Weekly Timer

FUNCTION:

- ◆ Mode: Choose Auto-Cool-Dry- Heat -Fan
- ◆ Fan speed: Auto/Low/Med/High speed
- ◆ Swing(on some models)
- ◆ Timer ON/OFF
- ◆ Temp setting
- ◆ Weekly timer
- ◆ Humidity Sensor Built-in
- ◆ Turbo
- ◆ 24-hour System
- ◆ 12-hour System
- ◆ Auto-restart
- ◆ Individual louver control (on some models)
- ◆ Automatic airflow test
- ◆ Rotation&Back-up
- ◆ Dual Control
- ◆ Group Control
- ◆ Child Lock
- ◆ LCD display TOUCHABLE SCREEN
- ◆ Clock




Wiring HA&HB OR 24V




HA&HB
(Communication)

Or



24V

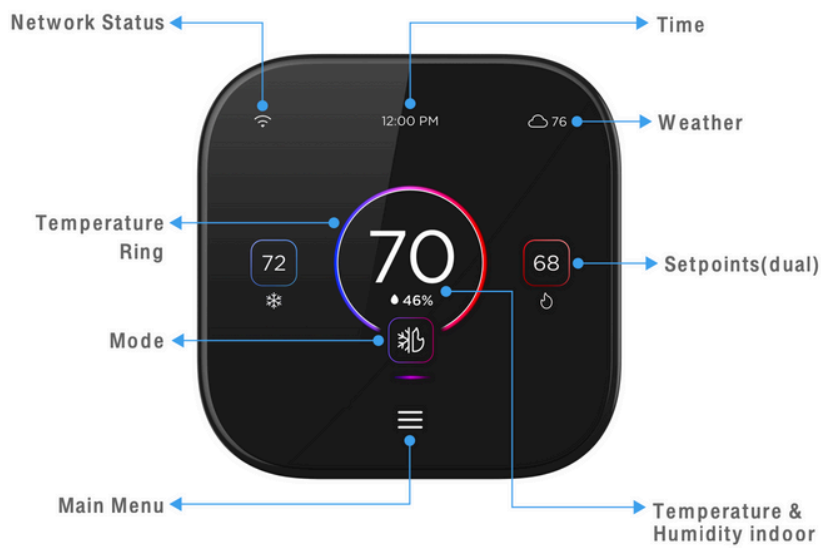

- °F °C / °F display
- Room temperature display
- RH Relative humidity display
- Wireless control feature display
- Follow me feature display
- Breeze away display
- Delay off display
- Turbo feature display
- ECO ECO feature display
- Purify feature display
- Filter reminder display
- SLEEP feature display
- GEAR GEAR feature display
- Breezeless display
- Rotation display
- Active clean display
- Intelligent eye display
- Electric heating display
- Main unit and secondary unit display