

Job Name: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted to: \_\_\_\_\_

Submitted by: \_\_\_\_\_

Reference: \_\_\_\_\_

Date: \_\_\_\_\_

Approval: \_\_\_\_\_

Construction: \_\_\_\_\_

Unit #: \_\_\_\_\_

Drawing #: \_\_\_\_\_



## KEY FEATURES:

- Auto-Swing for horizontal louvers
- Genius Core ultra-low compressor speed of 12Hz
- New User-Friendly Remote Controller design
- 46° Freeze Protection
- Smart Kit Included
- Turbo Mode
- TU1 Copper Tubes
- Self-Clean Function (Single-Zone only)
- Eco Mode (single zone only)
- Follow Me Mode
- Timer On/Off




## SPECIFICATIONS:

Indoor Model			CH-R24MOLVWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	
Heating	Rated Capacity	Btu/h	
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8"/5/8"
Dehumidification		Pnt/H	
Communication wiring			14AWG*4
Indoor	Dimension (W×D×H)	Inch	42.60 x 9.21 x 13.27
	Packing (W×D×H)	Inch	45.47 x 16.34 x 12.40
	Net/Gross Weight	lbs.	30.86/40.56

**OLIVIA**

Units: in

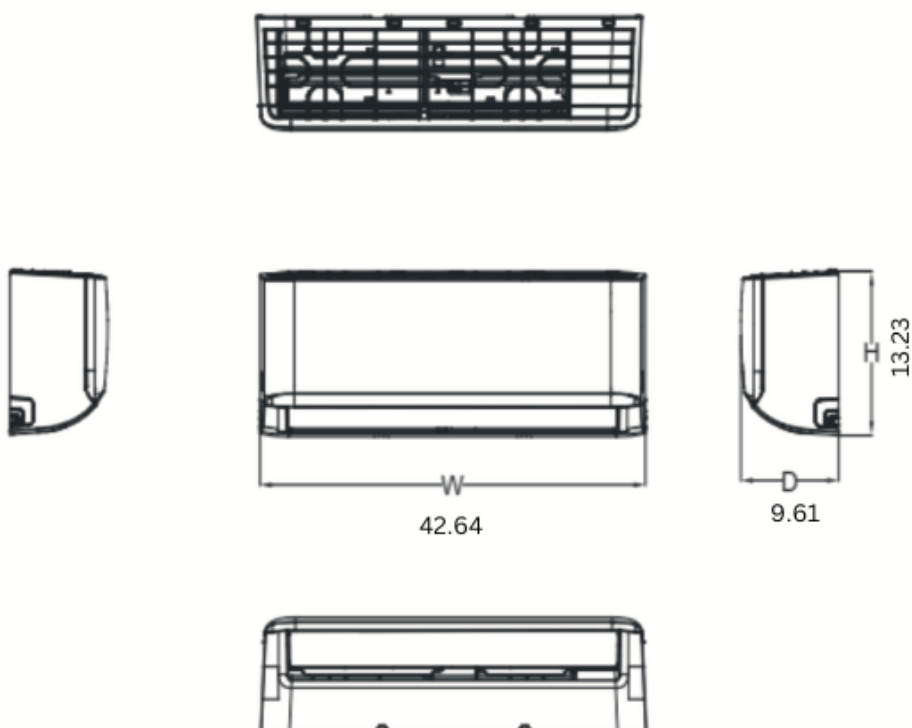

**Dimension (WxDxH)**  
**42.64x9.61x13.23**