

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____


Date: _____

Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

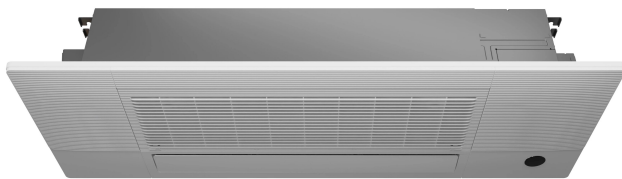

KEY FEATURES:

- Two-way Draining Connection
- Activated Carbon Filter
- GoldFin Anti-Corrosive Coating
- Omni-Directional Airflow
- 12 Indoor Fan Speeds
- Refrigerant Leakage Detection
- Self Diagnosis Function
- Fresh Air Intake



SPECIFICATIONS:

Indoor Model			CH-RSH06-12MCT1W
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	
Heating	Rated Capacity	Btu/h	
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/3/8"
Dehumidification		Pnt/H	
Communication wiring			14AWG*4
Indoor	Dimension (W×D×H)	Inch	50.31 x 13.19 x 8.98
	Packing (W×D×H)	Inch	57.60 x 22.48 x 22.64
	Net/Gross Weight	lbs.	45.19/82.45

