

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_



### KEY FEATURES:

- Single or Multi-Zone Application
- Humidity Sensor
- Easy access E-Box and PCB
- Easy-to-remove blower wheel
- Auto-Swing for vertical and horizontal louvers
- Smart Kit Included
- Can be installed up to 2" from ceiling
- Compatible with Regular and Hyper Heat Outdoor units




### SPECIFICATIONS:

Indoor Model			CH-RH09MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	9,000
Heating	Rated Capacity	Btu/h	12,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	441.4 / 323.7 / 229.6 / 176.6
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	38/33/20.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/3/8"
Dehumidification		Pnt/H	0.63
Communication wiring			AWG 14-4
Indoor	Dimension (WxDxH)	Inch	33.74 x 9.09 x 11.81
	Packing (WxDxH)	Inch	36.22x12.20x14.57
	Net/Gross Weight	lbs.	23.37/29.98

**ASTORIA**

Units: in

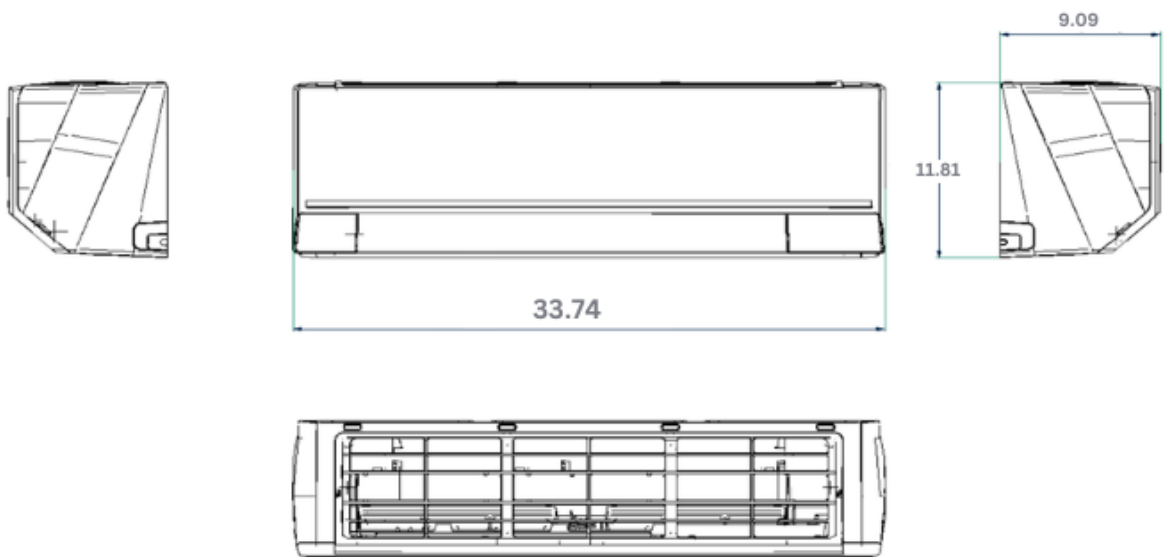

**Dimension (WxDxH)**  
**33.74 x 9.09 x 11.81**