

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____


Date: _____

Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

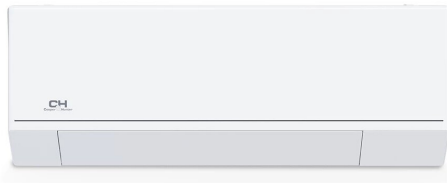

KEY FEATURES:

- Single or Multi-Zone Application
- Humidity Sensor
- Easy access E-Box and PCB
- Easy-to-remove blower wheel
- Auto-Swing for vertical and horizontal louvers
- Smart Kit Included
- Can be installed up to 2" from ceiling
- Compatible with Regular and Hyper Heat Outdoor units




SPECIFICATIONS:

Indoor Model			CH-RH24MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	24,000
Heating	Rated Capacity	Btu/h	29,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	812.3 / 618.0 / 412.0 / 317.8
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	43.5/38.5/27
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8"/5/8"
Dehumidification		Pnt/H	5.71
Communication wiring			AWG 14-4
Indoor	Dimension (WxDxH)	Inch	47.13 x 11.02 x 14.61
	Packing (WxDxH)	Inch	50.39x14.17x17.91
	Net/Gross Weight	lbs.	43.65/55.56

ASTORIA

Units: in

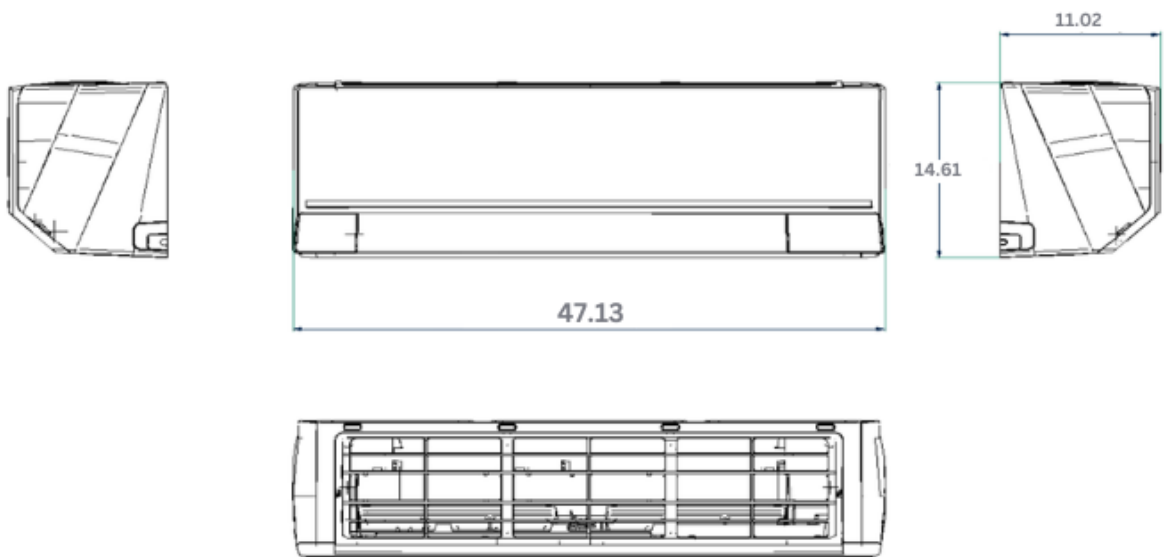

Dimension (WxDxH)
47.13 x 11.02 x 14.61