




UP TO 27.4 SEER2

Available only through official
Cooper&Hunter Distributors.

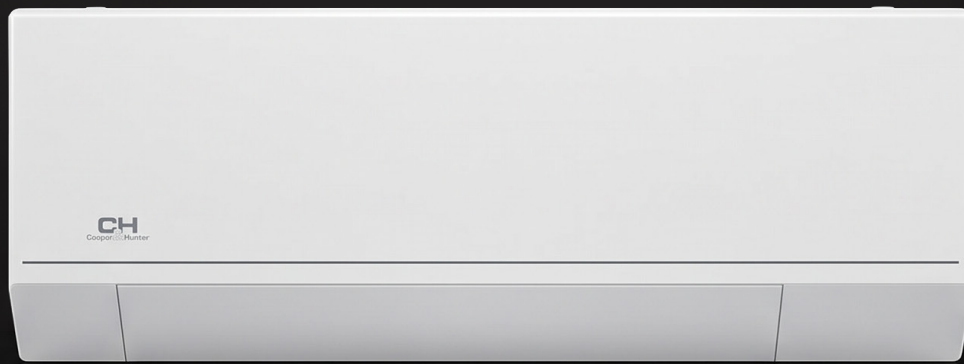

WATCH OUR
INFORMATIONAL VIDEO



The **Cooper&Hunter ASTORIA PRO** includes
an integrated **humidity sensor** and a built-in
refrigerant sensor to optimize indoor air quality,
enhance comfort tracking, and support
safety controls.

Proud Sponsors



cooperandhunter.us | TECHNICAL SUPPORT 1-888-293-9252





Refrigerant
Sensor



Humidity*
Sensor



CONTROL OPTIONS


- Smart Kit Included with Downloadable C&H app
- Remote Control Included
- 12V Wall Thermostat (Purchased Separately)



INDOOR			CH-PRO06MASTWM-230VI	CH-PRO09MASTWM-230VI	CH-PRO12MASTWM-230VI	CH-PRO15MASTWM-230VI	CH-PRO18MASTWM-230VI	CH-PRO24MASTWM-230VI	CH-PRO33HASTWM-230VI	CH-PRO09MASTWM-230VI	CH-PRO12MASTWM-230VI	CH-PRO18MASTWM-230VI	CH-PRO24MASTWM-230VI	CH-PRO30MASTWM-230VI	CH-PRO36MASTWM-230VI
Indoor Model															
Power Supply	Rated	V, Ph, Hz	208/230,60,1	208/230,60,1	208/230,60,1	208/230,1, 60	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1
Rated Capacity	Cooling	Btu/h	6,000	9,000	12,000	15,400	18,000	24,000	33,000	9,000	12,000	18,000	24,000	30,000	36,000
	Heating	Btu/h	7,000	12,000	12,000	15,400	18,000	29,000	36,000	10,000	12,000	18,000	25,000	30,000	36,000
Minimum Circuit Ampacity (MCA)		A	3	3	3	3	3	3	3	3	3	3	3	3	3
Max. Fuse		A	15	15	15	15	15	15	15	15	15	15	15	15	15
Indoor Air Flow (Turbo/Hi/Mi/Lo/Si)		CFM	382.6/323.7/229.6/ 176.6/147.2	441.4/323.7/229.6/ 176.6/147.2	441.4/323.7/229.6/ 176.6/147.2	635.7/500.3/359.0/ 294.3 / /	635.7/500.3/359.0/ 294.3/-	812.3/618.0/412.0/ 317.8/-	865.2/735.8/600.4/ 423.8/-	441.4/323.7/229.6 /176.6/147.2	441.4 / 323.7 / 229.6 / 176.6 / 147.2	635.7/500.3/359.0/ 294.3/-	812.3/618.0/412.0/ 317.8/-	882.9/635.7/506.2/ 382.6/-	882.9/635.7/506.2 /382.6/323.7
Indoor Noise Level (Turbo/Hi/Mi/Lo/Si)		dB(A)	44.0/36.5/32.5/22.0/19.5	N/A/38/33/20.5/19.5	47/36.5/32.5/22/19.5	49.5/45.0/38.0/31.5/19.5	49.5/45.0/38.0/31.5/19.5	54.5/43.5/38.5/27/16	57.0/53.0/46.5/35.5/29.5	47.5/43/31/18/17	46/38/33.0/18.0/18	49/45/39/28/20	51.5/43.5/39.5/21.5/19	53.0/45.5/40/30.5/19.5	N/A/49/43.5/34.5/31.5
Indoor	Dimension (WxDxH)	inch	33.74x9.09x11.81	33.74x9.09x11.81	33.74x9.09x11.81	40.31x9.69x12.64	40.31x9.69x12.64	47.13x11.02x14.61	47.13x11.02x14.61	33.74x9.09x11.81	33.74 x 9.09 x 11.81	40.31x9.69x12.64	47.13x11.02x14.61	47.13x11.02x14.61	47.13x11.02x14.61
	Packing (WxDxH)	inch	36.22x12.20x14.57	36.22x12.20x14.57	36.22x12.20x14.57	43.11x12.80x15.75	43.11x12.80x15.75	50.39x14.17x17.91	50.39x14.17x17.91	36.22x12.20x14.57	36.22x12.20x14.57	43.11x12.80x15.75	50.39x14.17x17.91	50.39x14.17x17.91	50.39x14.17x17.91
	Net/Gross Weight	lbs.	22.93/29.32	23.37/29.98	22.93/29.32	27.34/36.60	27.34/36.60	43.65/55.56	43.21/55.78	23.37/29.98	22.93/29.32	27.34/36.60	43.65/55.56	43.21/54.67	43.21/54.67
Room Temperature	Cooling	F	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90
	Heating	F	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86	32~86
Liquid Side/Gas Side		Inch	1/4"/3/8"	1/4"/3/8"	1/4"/3/8"	1/4" / 1/2"	1/4"/1/2"	3/8"/5/8"	3/8"/3/4"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 5/8"	3/8" / 5/8"

			HYPER							REGULAR				ENTRY LEVEL			
OUTDOOR	Outdoor Model			CH-RHP06F9-230VO	CH-RHP09-230VO	CH-RHP12-230VO	CH-RHP15-230VO	CH-RHP18-230VO	CH-RHP24-230VO	CH-RHP33-230VO	CH-RES09-230VO	CH-RES12-230VO	CH-RES18-230VO	CH-RES24-230VO	CH-REL30-230VO	CH-REL36-230VO	
	Power Supply	Rated	V, Ph, Hz	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	208/230,60,1	
		Voltage Range	V	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Cooling	Capacity Min~Max	Btu/h	2,300~12,600	3,800~13,500	3,800~14,600	8,800~19,400	8,800~19,400	12,600~27,900	15,000~37,000	2200~13000	2900~14500	3500~18900	5500~29500	6500~32800	6600~36800	
		Rated Current	A	3.1	4.1	4.0	7.1	6.4	8.3	12.7	4.5	4.1	6.3	7.4	11.2	18.0	
		EER2		18.0	15.4	13.4	13.5	12.5	13.0	12.0	14.9	13.0	12.7	14	12	8.6	
		SEER2		25.5	27.4	25.4	22.2	21.4	21	19.5	25.8	25.5	23.5	23	20.5	19.0	
	Heating	Capacity Min~Max	Btu/h	3,000~11,000	3,800~16,000	3,800~16,000	11,200~19,500	11,200~19,500	11,800~29,700	19,700~37,800	4,100~13,800	4,500~15,400	7,700~21,000	9,900~30,800	12,600~31,400	9,600~38,000	
		Rated current	A	4.0	4.1	4.1	8.5	7.2	11.0	13.7	3.3	4.0	6.7	8.3	13.1	16.2	
		COP	W/W	4.20	3.76	3.76	3.5	3.26	3.42	3.37	3.90	3.90	3.50	3.96	3.08	2.85	
HSPF4			14.8	12.5	10.5	11.5	11.0	13.5	10.5	12.5	10.6	10.8	11.7	9.5	8.5		
HSPF5			11.5	9.5	8.0	8.5	8.5	9.8	8.6	9.2	8.0	8.0	8.7	7.2	6.6		
Heating at 17°F (AHRI)		Rated capacity	Btu/h	9,200	12,800	12,800	19,200	19,200	25,000	30,200	9,400	9,600	14,900	19,300	21,500	24,200	
Heating at 5°F (-15°C)		Rated capacity	Btu/h	7,700	11,500	11,500	17,500	18,000	24,200	35,000	8,000	8,400	12,800	19,600	20,000	22,000	
		COP	W/W	2.39	1.80	1.80	1.83	1.92	2.34	1.98	2.36	2.30	2.10	2.54	2.03	1.90	
Minimum Circuit Ampacity			A	12.0	15.0	15.0	19	19.0	24.9	34.0	12	12	18	24	28	33	
Max.Fuse (Outdoor Unit)			A	15	15	15	20	20	25	35	15	15	20	25	30	35	
Outdoor Air Flow (Max.)			CFM	1,235.3	1,470.6	1,470.6	1764.7	1,764.7	2,235.3	2,235.3	1235.3	1235.3	1764.7	2235.3	2235.3	2235.3	
Outdoor Noise Level (Sound Pressure)			dB(A)	53	56	56	59	59	61.5	63.5	52.5	56	58	58	61	63	
Dimension (W×D×H)			inch	30.12x11.93x21.85	31.69x12.99x21.81	31.69x12.99x21.81	35.04x13.46x26.50	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	30.12x11.93x21.85	30.12x11.93x21.85	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	37.24x16.14x31.89	
Packing (W×D×H)			inch	34.92x13.27x24.02	36.02x14.57x24.21	36.02x14.57x24.21	39.17x15.67x29.13	39.17x15.67x29.13	42.91x19.68x34.84	42.91x19.68x34.84	34.92x13.27x24.02	34.92x13.27x24.02	39.17x15.67x29.13	42.91x19.68x34.84	42.91x19.68x34.84	42.91x19.68x34.84	
Net/Gross Weight			lbs.	62.17/67.68	72.75/78.70	72.75/78.70	99.87/107.80	99.87/107.80	130.29/141.31	156.97/167.99	62.17/67.68	62.17/67.68	92.59/100.31	122.13/132.28	142.86/154.54	150.35/160.27	
Refrigerant Type / Charge			oz.	R454B / 32.45	R454B / 35.27	R454B / 35.27	R454B/55.38	R454B / 55.38	R454B / 63.49	R454B / 87.13	R454B/ 32.45	R454B/ 32.45	R454B/ 47.97	R454B/ 70.55	R454B / 84.66	R454B / 112.88	
Refrigerant Precharge Length			ft.	25	25	25	25	25	25	25	25	25	25	25	25	25	
Additional Charge for Each ft.			oz/ft	0.16	0.16	0.16	0.16	0.16	0.32	0.32	0.16	0.16	0.16	0.32	0.32	0.32	
Design Pressure			PSIG	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	
Refrigerant Piping Liquid Side/Gas Side			inch	1/4"/3/8"	1/4"/3/8"	1/4"/3/8"	1/4" / 1/2"	1/4"/1/2"	3/8"/5/8"	3/8"/3/4"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 5/8"	3/8" / 5/8"	
Max. Pipe Length			ft.	82	82	82	98.4	98.4	164	164	82	82	98.40	164	164	213.20	
Max. Difference in Level			ft.	49.20	49.20	49.20	65.60	65.60	82	82	49.2	49.2	65.6	82	82	98.4	
Ambient Temperature		Cooling	°F	-22~122	-22~122	-22~122	-22~122	-22~122	-22~122	-22~122	-13~122	-13~122	-13~122	-13~122	-13~122	-13~122	
		Heating	°F	-22~75	-22~75	-22~75	-22~75	-22~75	-22~75	-22~75	-22~75	-13~75	-13~75	-13~75	-13~75	-13~75	-13~75
Certifications		ETL		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
		AHRI		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		Energy Star for Cold Climate		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		NEEP		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

* Humidity Sensor is only functional on Single-Zone Systems

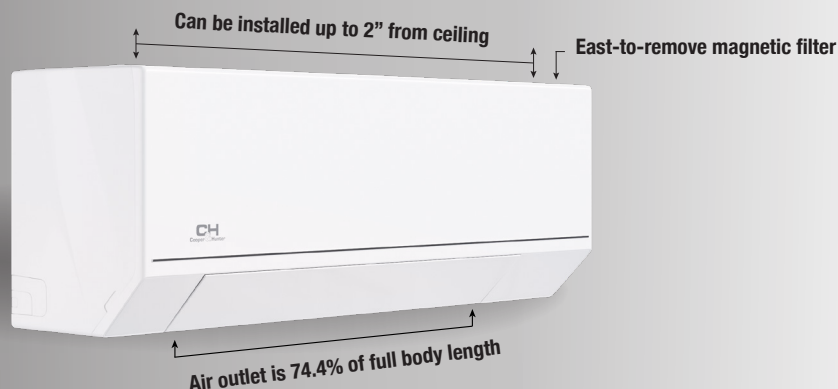


Line Set Model 3/4"	Line Set Model 1/2"	Line Set Size
PJX-N1-C16FTW-MAX	PJX-N1-C16FTW-MAX-i05	1/4" – 3/8"
PJX-N1-C25FTW-MAX	PJX-N1-C25FTW-MAX-i05	1/4" – 3/8"
PJX-N1-C50FTW-MAX	PJX-N1-C50FTW-MAX-i05	1/4" – 3/8"
PJX-N2-C16FTW-MAX	PJX-N2-C16FTW-MAX-i05	1/4" – 1/2"
PJX-N2-C25FTW-MAX	PJX-N2-C25FTW-MAX-i05	1/4" – 1/2"
PJX-N2-C50FTW-MAX	PJX-N2-C50FTW-MAX-i05	1/4" – 1/2"
PJX-N3-C16FTW-MAX	PJX-N3-C16FTW-MAX-i05	3/8" – 5/8"
PJX-N3-C25FTW-MAX	PJX-N3-C25FTW-MAX-i05	3/8" – 5/8"
PJX-N3-C50FTW-MAX	PJX-N3-C50FTW-MAX-i05	3/8" – 5/8"
PJX-N4-C25FTW-MAX		3/8" – 3/4"
PJX-N4-C50FTW-MAX		3/8" – 3/4"
PJX-N6-C25FTW-MAX		3/8" – 7/8"
PJX-N6-C50FTW-MAX		3/8" – 7/8"

DOWNLOAD THE
COOPER&HUNTER
REMOTE APP



6K, 9K, 12K, 15K, 18K, 24K, 30K, 33K, 36K Btu/h

- E-Box and PCB located in the front of the unit with a cover kickstand providing easy access.
- Revolutionary design offers convenient disassembly & maintenance with an easy-to-remove blower wheel.
- Larger air inlet/outlet for improved air flow
- Easy to remove magnetic filter on top
- Compatible with regular (-13°F) or Hyper (-22°F) outdoor units
- Included Refrigerant Sensor
- Humidity Sensor*
- Auto-Swing for vertical and horizontal louvers
- Self-Cleaning function*
- Follow Me mode
- Eco Mode*
- Freeze Protection Function(46F heating)**

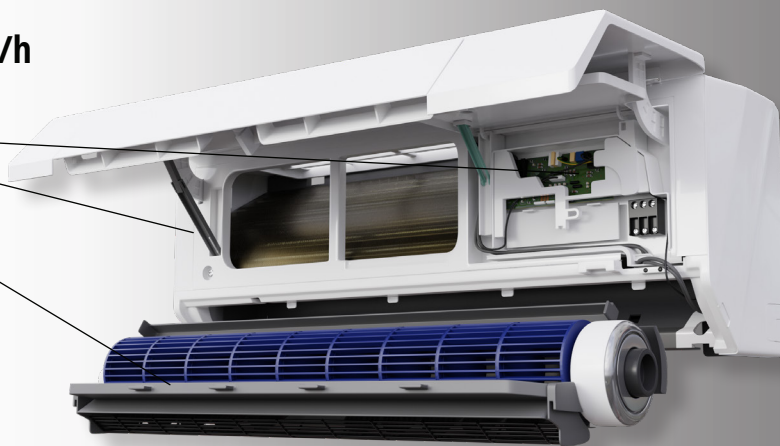

Note: 6K & 33K Btu/h single-zone wall mounts can only be paired with Hyper condenser.

*Only functional on Single-Zone Systems

**FP Function only available on Hyper/Single Systems



cooperandhunter.us | TECHNICAL SUPPORT 1-888-293-9252

Your actual Inverter Heat Pump system and related devices may differ from images shown in this specification sheet. Test conditions are based on AHRI 210/240. Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change specifications or designs at any time without incurring obligations.

© 08.2026 All rights reserved.

WATCH OUR
INFORMATIONAL
VIDEO



CH
Cooper & Hunter