

CH

Cooper & Hunter

ASTORIA

WALL MOUNTED SINGLE & MULTI-ZONE MINI SPLITS

UP TO 27.4 SEER2



cooperandhunter.us | TECHNICAL SUPPORT 1-888-293-9252





Humidity*
Sensor



CONTROL OPTIONS

- Smart Kit Included with Downloadable C&H app
- Remote Control Included
- 12V Wall Thermostat (Purchased Separately)



INDOOR

Indoor Model			CH-RH06MASTWM-230VI	CH-RH09MASTWM-230VI	CH-RH12MASTWM-230VI	CH-RH15MASTWM-230VI	CH-RH18MASTWM-230VI	CH-RH24MASTWM-230VI	CH-RH33HASTWM-230VI	CH-RH09MASTWM-230VI	CH-RH12MASTWM-230VI	CH-RH18MASTWM-230VI	CH-RH24MASTWM-230VI	CH-RH30MASTWM-230VI	CH-RH36MASTWM-230VI
Power Supply	Rated	V, Ph, Hz	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1,60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230, 1, 60
Cooling	Rated Capacity	Btu/h	6,000	9,000	12,000	15,400	18,000	24,000	33,000	9,000	12,000	18,000	24,000	30,000	6,600~36,800
Minimum Circuit Ampacity (MCA)		A	3	3	3	3	3	3	3	3	3	3	3	3	3
Max. Fuse		A	15	15	15	15	15	15	15	15	15	15	15	15	15
Indoor Air Flow (Turbo/HI/Mi/Lo/Si)		CFM	382.6/323.7/229.6/ 176.6/ 147.2	441.4/323.7/229.6/ 176.6/147.2	441.4/323.7/229.6/ 176.6/147.2	635.7/500.3/359.0/ 294.3 / /	635.7/500.3/359.0/ 294.3 / /	812.3/618.0/412.0/ 317.8 / /	865.2/735.8/600.4/ 423.8 / /	441.4/323.7/229.6/ 176.6 / 147.2	441.4/323.7/229.6/ 176.6 / 147.2	635.7/500.3/359.0/ 294.3 / /	812.3/618.0/412.0/ 317.8 / /	882.9/635.7/506.2/ 382.6 / /	882.9/635.7/506.2/ 382.6/323.7
Indoor Noise Level (Turbo/HI/Mi/Lo/Si)		dB(A)	44.0/36.5/32.5/22.0/19.5	N/A/38/33/20.5/19.5	47/36.5/32.5/22/19.5	49.5/45.0/38.0/31.5/19.5	49.5/45.0/38.0/31.5/19.5	54.5/43.5/38.5/27/16	57.0/53.0/46.5/35.5/29.5	47.5/43/31/18/17	46/38/33.0/18.0/18	49/45/39/28/20	51.5/43.5/39.5/21.5/19	53.0/45.5/40/30.5/19.5	N/A/49/43.5/34.5/31.5
Indoor	Dimension (W×D×H)	inch	33.74x9.09x11.81	33.74x9.09x11.81	33.74x9.09x11.81	40.31x9.69x12.64	40.31x9.69x12.64	47.13x11.02x14.61	47.13x11.02x14.61	33.74x9.09x11.81	33.74x9.09x11.81	40.31x9.69x12.64	47.13x11.02x14.61	47.13x11.02x14.61	47.13x11.02x14.61
	Packing (W×D×H)	inch	36.22x12.20x14.57	36.22x12.20x14.57	36.22x12.20x14.57	43.11x12.80x15.75	43.11x12.80x15.75	50.39x14.17x17.91	50.39x14.17x17.91	36.22x12.20x14.57	36.22x12.20x14.57	43.11x12.80x15.75	50.39x14.17x17.91	50.39x14.17x17.91	50.39x14.17x17.91
	Net/Gross Weight	lbs.	22.93/29.32	23.37/29.98	22.93/29.32	27.34/36.60	27.34/36.60	43.65/55.56	43.21/55.78	23.37/29.98	22.93/29.32	27.34/36.60	43.65/55.56	43.21/54.67	43.21/54.67
Room Temperature	Cooling	F	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90	60~90
	Heating	F	32-86	32-86	32-86	32-86	32-86	32-86	32-86	32~86	32~86	32~86	32~86	32~86	32~86
Liquid Side/Gas Side		Inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 3/4"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 5/8"	3/8" / 5/8"

OUTDOOR


HYPER

REGULAR

ENTRY LEVEL

Outdoor Model			CH-RHP06F9-230VO	CH-RHP09-230VO	CH-RHP12-230VO	CH-RHP15-230VO	CH-RHP18-230VO	CH-RHP24-230VO	CH-RHP33-230VO	CH-RES09-230VO	CH-RES12-230VO	CH-RES18-230VO	CH-RES24-230VO	CH-REL30-230VO	CH-REL36-230VO
Power Supply	Rated	V, Ph, Hz	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60	208/230,1, 60
	Voltage Range	V	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
Cooling	Capacity Min~Max	Btu/h	2,300~12,600	3,800~13,500	3,800~14,600	8,800~19,400	8,800~19,400	12,600~27,900	15,000~37,000	2,200~13,000	2,900~14,500	3,500~18,900	5,500~29,500	6,500~32,800	6,600~36,800
	Rated Current	A	3.1	4.1	4.0	7.1	6.4	8.3	12.7	4.5	4.1	6.3	7.4	11.2	18.0
	EER2		18	15.4	13.4	13.5	12.5	13	12	14.9	13	12.7	14	12	8.6
	SEER2		25.5	27.4	25.4	22.2	21.4	21	19.5	25.8	25.5	23.5	23	20.5	19
Heating at 47°F	Capacity Min~Max	Btu/h	3,000~11,000	3,800~16,000	3,800~16,000	11,200~19,500	11,200~19,500	11,800~29,700	19,700~37,800	4,100~13,800	4,500~15,400	7,700~21,000	9,900~30,800	12,600~31,400	9,600~38,000
	Rated Current	A	4.0	4.1	4.1	8.5	7.2	11.0	13.7	3.3	4.0	6.7	8.3	13.1	16.2
	COP	W/W	4.20	3.76	3.76	3.5	3.26	3.42	3.37	3.90	3.90	3.50	3.96	3.08	2.85
	HSPF4		14.8	12.5	10.5	11.5	11.0	13.5	10.5	12.5	10.6	10.8	11.7	9.5	8.5
	HSPF5		11.5	9.5	8.0	8.5	8.5	9.8	8.6	9.2	8.0	8.0	8.7	7.2	6.6
Heating at 17°F (AHRI)	Rated capacity	Btu/h	9,200	12,800	12,800	19,200	19,200	25,000	30,200	9,400	9,600	14,900	19,300	21,500	24,200
Heating at 5°F (-15°C)	Rated capacity	Btu/h	7,700	11,500	11,500	17,500	18,000	24,200	35,000	8,000	8,400	12,800	19,600	20,000	22,000
Minimum Circuit Ampacity		A	12	15	15	19	19	24.9	34	12	12	18	24	28	33
Max.Fuse (Outdoor Unit)		A	15	15	15	20	20	25	35	15	15	20	25	30	35
Outdoor Air Flow (Max.)		CFM	1235.3	1470.6	1470.6	1764.7	1764.7	2235.3	2235.3	1235.3	1235.3	1764.7	2235.3	2235.3	2235.3
Outdoor Noise Level (Sound Pressure)		dB(A)	53	56	56	59	59	61.5	63.5	52.5	56	58	58	61	63
Outdoor	Dimension (W×D×H)	inch	30.12x11.93x21.85	31.69x12.99x21.81	31.69x12.99x21.81	35.04x13.46x26.50	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	30.12x11.93x21.85	30.12x11.93x21.85	35.04x13.46x26.50	37.24x16.14x31.89	37.24x16.14x31.89	37.24x16.14x31.89
	Packing (W×D×H)	inch	34.92x13.27x24.02	36.02x14.57x24.21	36.02x14.57x24.21	39.17x15.67x29.13	39.17x15.67x29.13	42.91x19.68x34.84	42.91x19.68x34.84	34.92x13.27x24.02	34.92x13.27x24.02	39.17x15.67x29.13	42.91x19.68x34.84	42.91x19.68x34.84	42.91x19.68x34.84
	Net/Gross Weight	lbs.	62.17/67.68	72.75/78.70	72.75/78.70	99.87/107.80	99.87/107.80	130.29/141.31	156.97/167.99	62.17/67.68	62.17/67.68	92.59/100.31	122.13/132.28	142.86/154.54	150.35/160.27
Refrigerant Type / Charge		oz.	R454B/32.45	R454B/35.27	R454B/35.27	R454B/55.38	R454B/55.38	R454B/63.49	R454B/87.13	R454B/32.45	R454B/32.45	R454B/47.97	R454B/ 70.55	R454B/84.66	R454B/112.88
Refrigerant Precharge Length		ft.	25	25	25	25	25	25	25	25	25	25	25	25	25
Additional Charge for Each ft.		oz/ft	0.16	0.16	0.16	0.16	0.16	0.32	0.32	0.16	0.16	0.16	0.32	0.32	0.32
Design Pressure		PSIG	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340	550/340
Refrigerant Piping Liquid Side/Gas Side		inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 3/4"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"	3/8" / 5/8"	3/8" / 5/8"
Max. Pipe Length		ft.	82	82	82	98.4	98.4	164	164	82	82	98.4	164	164	213.2
Max. Difference in Level		ft.	32.8	32.8	32.8	65.60	66	82	82	49.2	49.2	65.6	82	82	98.4
Ambient Temperature	Cooling	°F	-22~122	-22~122	-22~122	-22~122	-22~122	-22~122	-22~122	-13~122	-13~122	-13~122	-13~122	-13~122	-13~122
	Heating	°F	-22~75	-22~75	-22~75	-22~75	-22~75	-22~75	-22~75	-13~75	-13~75	-13~75	-13~75	-13~75	-13~75
Certifications	ETL		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	AHRI		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Energy Star for Cold Climate		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	NEEP		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

* Humidity Sensor is only functional on Single-Zone Systems

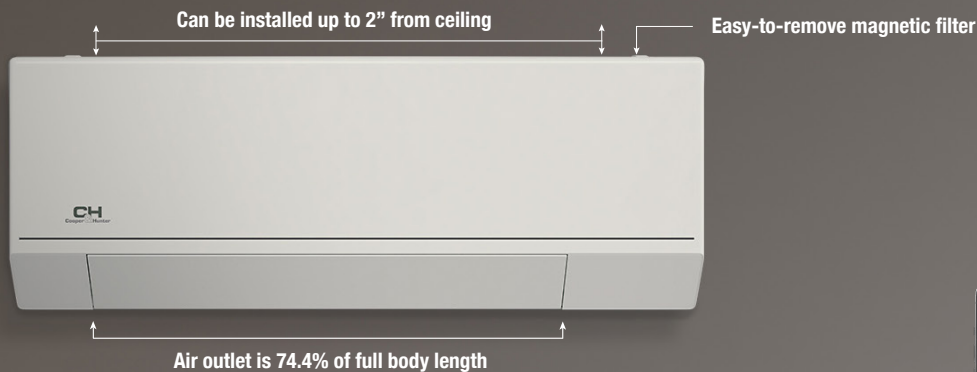

DOWNLOAD THE
COOPER&HUNTER
REMOTE APP




6K, 9K, 12K, 15K, 18K, 24K, 30K, 33K, 36K Btu/h

- E-Box and PCB located in the front of the unit with a cover kickstand providing easy access.
- Revolutionary design offers convenient disassembly & maintenance with an easy-to-remove blower wheel.
- Larger air inlet/outlet for improved air flow
- Easy to remove magnetic filter on top
- Compatible with regular (-13°F) or Hyper (-22°F) outdoor units
- Included Refrigerant Sensor
- Humidity Sensor*
- Auto-Swing for vertical and horizontal louvers
- Self-Cleaning function*
- Follow Me mode
- Eco Mode*
- Freeze Protection Function(46°F heating)**

*Only functional on Single-Zone Systems

**FP Function only available on Hyper/Single Systems

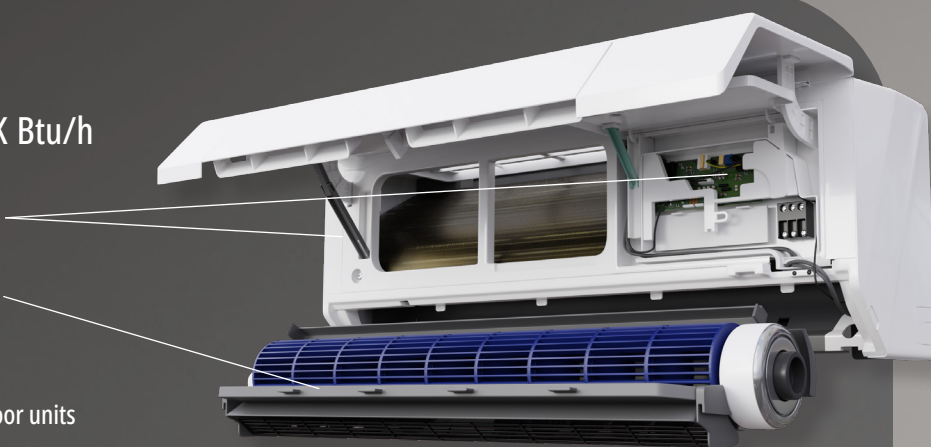

Note: 6K & 33K Btu/h single-zone wall mounts can only be paired with Hyper condenser.



CONTROL OPTIONS

- Smart Kit Included with Downloadable C&H app
- Remote Control Included
- 12V Wall Thermostat (Purchased Separately)

TECHNICAL SUPPORT
cooperandhunter.us | 1-888-293-9252

ASTORIA
WALL MOUNTED SINGLE & MULTI-ZONE MINI SPLITS

Your actual Inverter Heat Pump system and related devices may differ from images shown in this specification sheet. Test conditions are based on AHRI 210/240. Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change specifications or designs at any time without incurring obligations.

© 08.2026 All rights reserved.

SCAN HERE FOR ASTORIA MODELS



CH
Cooper & Hunter
ADDICTED TO COMFORT