

Job Name:	_____	Date:	_____
Location:	_____	Approval:	_____
Engineer:	_____	Construction:	_____
Submitted to:	_____	Unit #:	_____
Submitted by:	_____	Drawing #:	_____
Reference:	_____		




KEY FEATURES:

- Auto restart function / Adjustable static pressure
- WIFI ready / Quiet operation
- Multi position / Intelligent air flow
- Multiple fan speeds
- Anti-cold air function
- Refrigerant leak detect
- Auxiliary heater
- Fast cool/heat function
- Sleep mode / Turbo mode
- Aluminium coil
- Gold fin



SPECIFICATIONS:

Indoor Model			CH-RS24MAHU
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	24,000
Heating	Rated Capacity	Btu/h	25,000
Minimum Circuit Ampacity (MCA)		A	3.1
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	824.0 / 759.3 / 694.5 / 629.8
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	43.5/41.5/28.5
External static pressure (SlimDuct/AHU only)		in. WG	0.8
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8"/5/8"
Dehumidification		Pnt/H	5.49
Communication wiring			AWG 14-4
Indoor	Dimension (W×D×H)	Inch	17.52 x21.02 x 45
	Packing (W×D×H)	Inch	20.87 x 26.57 x 48.62
	Net/Gross Weight	lbs.	104.28/125.88

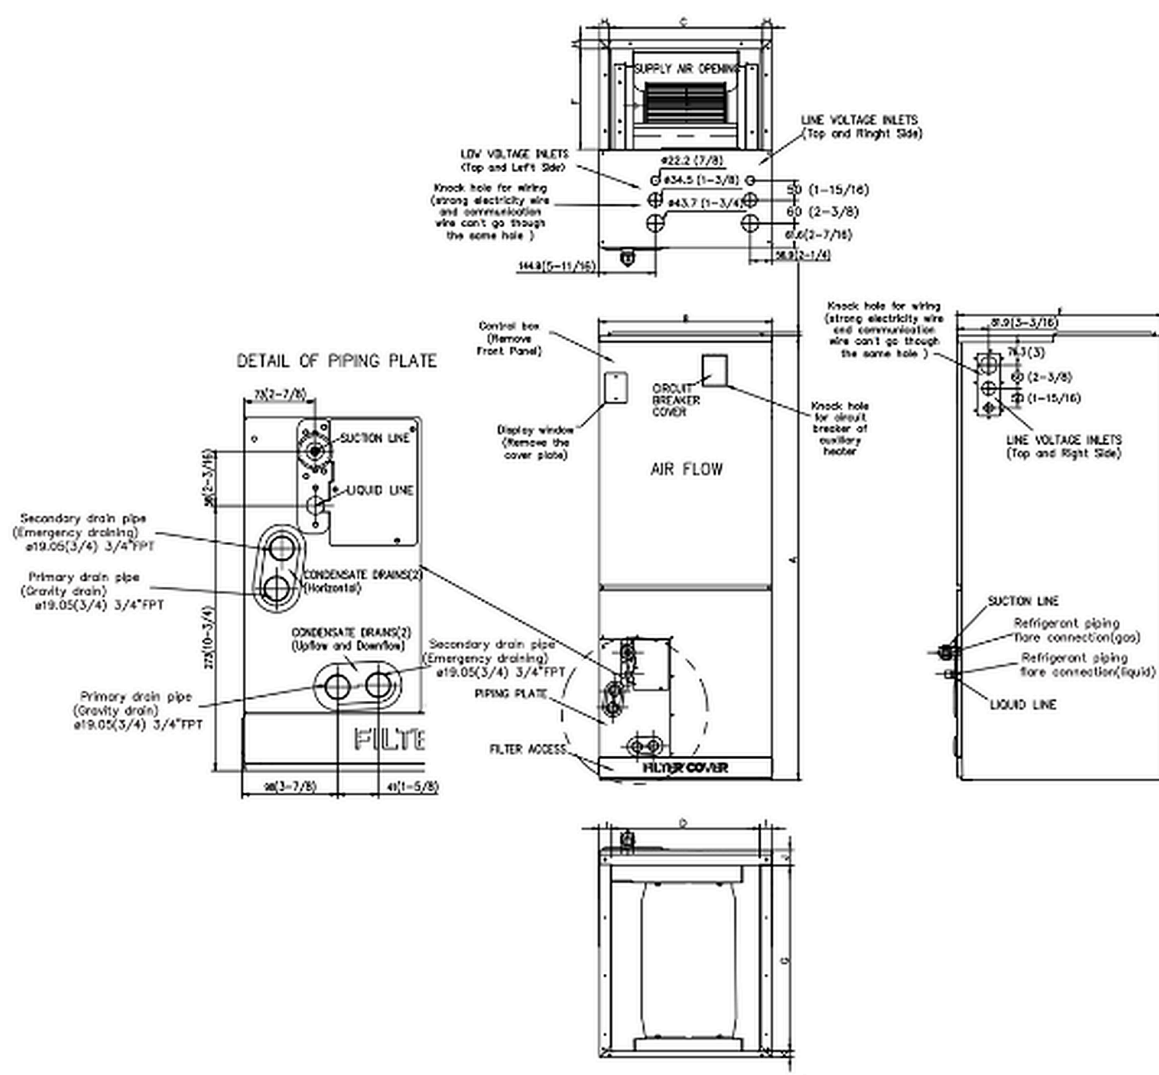

Dimensions	Model	18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19