


Job Name:	_____	Date:	_____
Location:	_____	Approval:	_____
Engineer:	_____	Construction:	_____
Submitted to:	_____	Unit #:	_____
Submitted by:	_____	Drawing #:	_____
Reference:	_____		



KEY FEATURES:

- Dip Switch 6k to 12K Btu
- Refrigerant Sensor
- GoldFin Anti-Corrosive Coating
- Humidity Sensor
- Built-in Circuit Breaker
- Built-in water pump
- Smart Kit Built-in

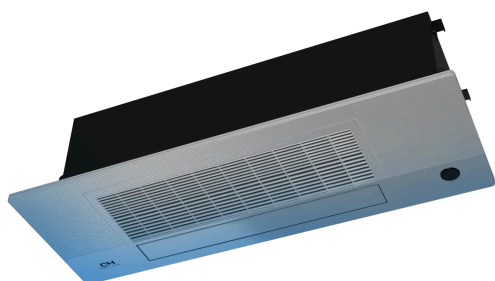


SPECIFICATIONS:

Indoor Model			CH-RSH18MCT1W
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	18,000
Heating	Rated Capacity	Btu/h	18,000
Minimum Circuit Ampacity (MCA)		A	2.1
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	400.2 / 352 / 300.2 / 207.2
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	44/41/29.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/1/2"
Dehumidification		Pnt/H	4.40
Communication wiring			AWG 14-4
Indoor	Dimension (W×D×H)	Inch	50.31 x 13.19 x 8.98
	Packing (W×D×H)	Inch	57.60 x 22.48 x 22.64
	Net/Gross Weight	lbs.	45.19/82.89

Installation place

(unit: inch/mm)

Perspective A

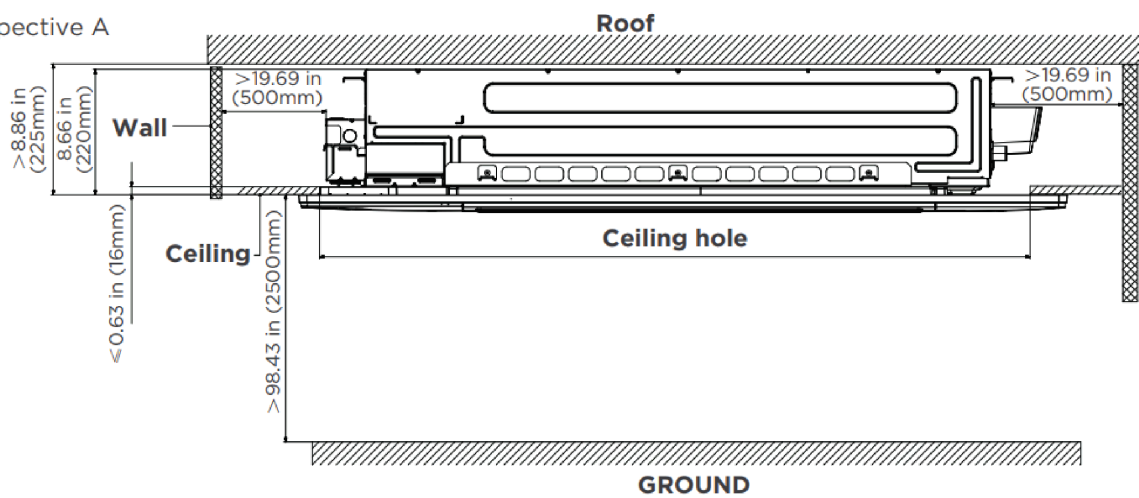

Perspective B

