


Job Name:	_____	Date:	_____
Location:	_____	Approval:	_____
Engineer:	_____	Construction:	_____
Submitted to:	_____	Unit #:	_____
Submitted by:	_____	Drawing #:	_____
Reference:	_____		



KEY FEATURES:

- Double blower wheel
- Refrigerant Sensor
- Auto-Swing for horizontal louvers
- Genius Core ultra-low compressor speed of 12Hz
- 46° Freeze Protection
- Smart Kit Ready
- Turbo Mode
- Follow Me Mode
- Smart kit Included

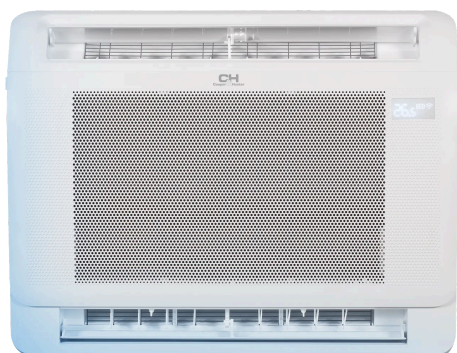

SPECIFICATIONS:

Indoor Model			CH-RSH16MMC
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	16,000
Heating	Rated Capacity	Btu/h	17,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	500.3 / 441.4 / 382.6 / 323.7
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	41.5/39/28.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	5/8"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/1/2"
Dehumidification		Pnt/H	4.63
Communication wiring			AWG 14-4
Indoor	Dimension (W×D×H)	Inch	31.26 x 7.87 x 24.45
	Packing (W×D×H)	Inch	34.06 x 11.02 x 28.31
	Net/Gross Weight	lbs.	32.85/41.89

