

Job Name:	_____	Date:	_____
Location:	_____	Approval:	_____
Engineer:	_____	Construction:	_____
Submitted to:	_____	Unit #:	_____
Submitted by:	_____	Drawing #:	_____
Reference:	_____		




KEY FEATURES:

- Refrigerant Sensor
- Humidity Sensor
- GoldFin Anti-Corrosive Coating
- Multiple Fan Speeds
- Easy service
- TU1 Cooper Coil
- Can be applied horizontally from the ceiling or
- vertically on a wall
- Inverter technology



SPECIFICATIONS:

Indoor Model			CH-RSH18MFC
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	18,000
Heating	Rated Capacity	Btu/h	18,000
Minimum Circuit Ampacity (MCA)		A	1.9
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	576.8 / 547.4 / 485.6 / 420.8
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	43/40/32
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/1/2"
Dehumidification		Pnt/H	4.44
Communication wiring			AWG 14-4
Indoor	Dimension (W×D×H)	Inch	42.05 x 26.57 x 9.25
	Packing (W×D×H)	Inch	45.08 x 29.72 x 12.52
	Net/Gross Weight	lbs.	58.42/70.55

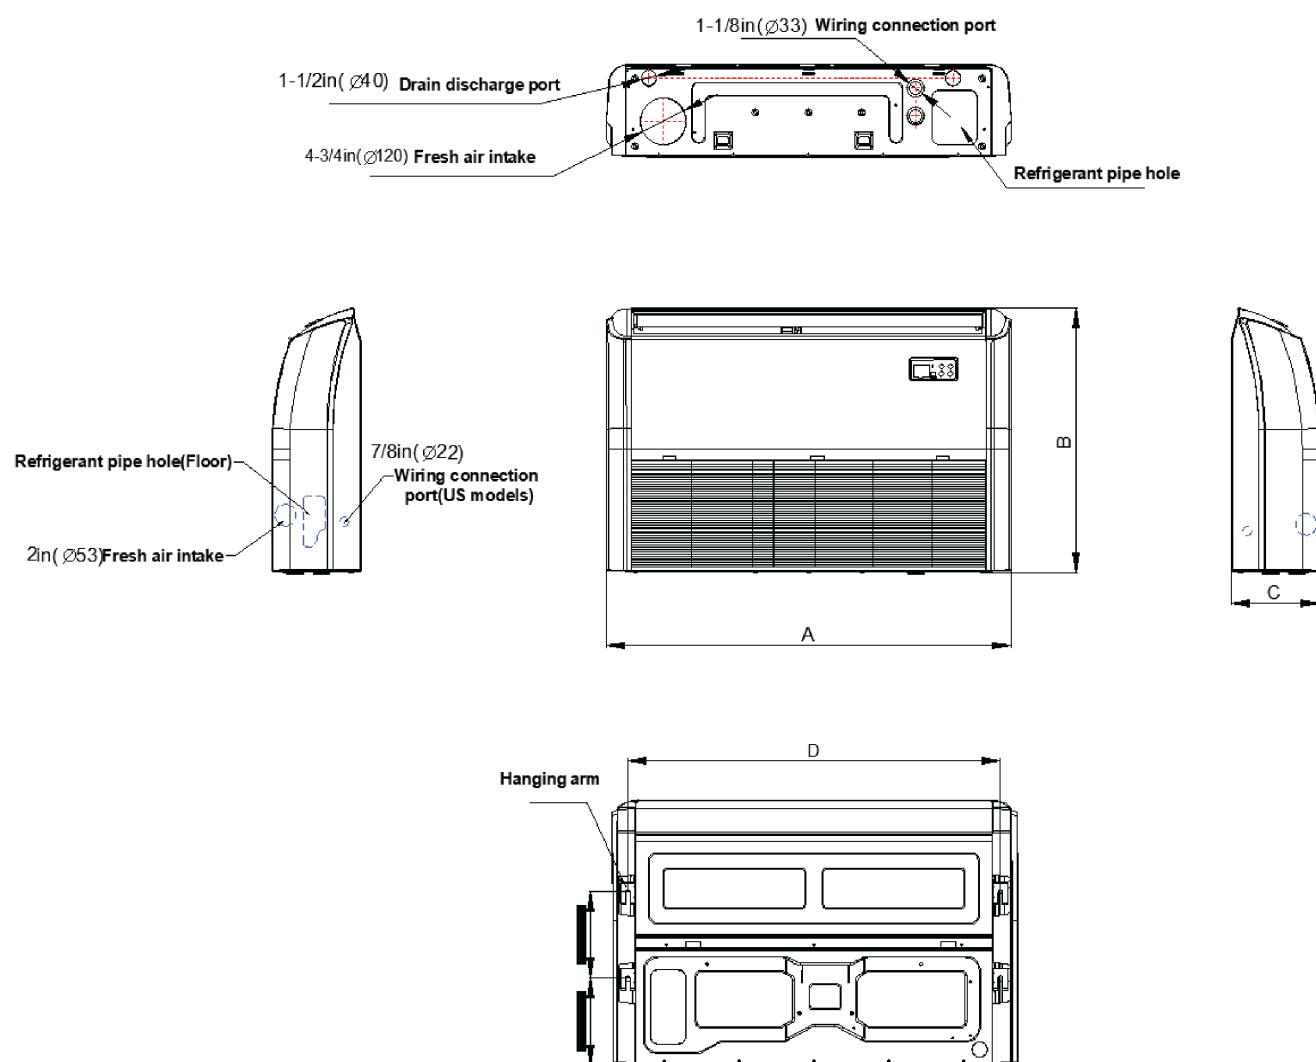

Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)